



SETUP SHEET

FOR THE RC10L3 Oval KIT



TEAM ASSOCIATED

DATE: _____
 DRIVER: _____
 TRACK LOCATION: _____
 EVENT: _____

FRONT SUSPENSION

UPPER ARM MOUNT: 0°  10° 

CASTER SHIM POSITION:
 rear centered front other _____

STEERING BLOCK: inline  trailing 

CAMBER, left _____ right _____
 TOE-IN: _____° TOE-OUT: _____°


FRONT SPRINGS

SPRINGS: .018 .020 .022 .024 other _____

KINGPIN: STD other _____


shim qty, thickness: _____
 shim qty, thickness: _____

shim qty, thickness: _____
 front ride height spacers: _____



REAR SUSPENSION

AXLE HEIGHT ADJUSTER:
 4-up 1-up 2-up #3 2-down 1-down 4-down



T-BAR THICKNESS: STD other _____

SHOCKS

CENTER SHOCK: STD other _____

OIL: _____ WT: _____

SPRING: _____ PISTON: #1 #2 #3

PRELOAD SPACERS: _____

SIDE SHOCKS: STD VCS other _____

OIL: _____ WT: _____

SPRING: _____

WHEELS & TIRES

WHEELS & TIRES	FRONT	REAR
TIRE TYPE		
WHEELS		
TIRE DIA		
STAGGER		
CAR WIDTH		

TWEAK SETTINGS:
 oz. (front) oz.

oz. (rear) oz.

SHADE IN AMOUNT OF TIRE TREATMENT

TIRE TREATMENT TYPE: _____
 REAR AXLE: STD other _____

OTHER

CHASSIS: STD other _____


CAR BODY: _____ WING/SPOILER: _____

MOTOR: _____ PINION: _____ SPUR GEAR: _____

BATTERIES: _____

INDICATE BATTERY PACK PLACEMENT:

POD: STD offset

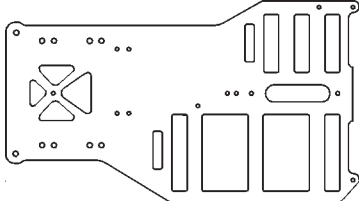

WHEELBASE: STD short
 OVERALL WEIGHT: _____

GENERAL

TRACK CONDITIONS:
 carpet asphalt concrete
 flat banked, amount of banking: _____ deg.
 track length: _____
 high traction low traction
 artificial (describe): _____
 other: _____

RACE COMMENTS/FINISH:

CAR COMMENTS/HANDLING:

