

FRONT

FRONT SHOCKS

 Plastic Aluminium

OIL: _____

PISTON: _____ holes

SPRING: _____

LENGTH: min _____

STEERING

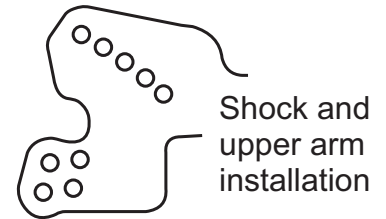
 TOE in out

 0 Medium High

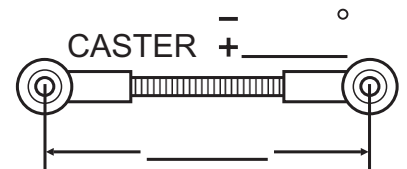

Tie rod installation

 CENTER STEERING Yes No

SERVO SAVER: _____



Shock and upper arm installation


 CAMBER - + 0


RIDE HEIGHT: _____ max _____

NOTE: _____

ANTI-ROLL BAR

 Wire No Ø: _____

 ONE-WAY No Center Front

REAR

REAR SHOCKS

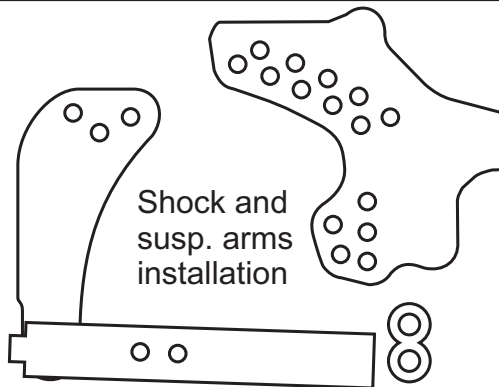
 Plastic Aluminium

OIL: _____

PISTON: _____ holes


SPRING: _____

LENGTH: min _____



Shock and susp. arms installation

 TOE IN Chassis 0,5° (47mm) 1° (48mm)

 Susp. arm 1° (#1) 2° (#2)


ANTI-SQUAT


RIDE HEIGHT: _____ max _____

NOTE: _____

ANTI-ROLL BAR

 Wire No Ø: _____

 In arm in out

 CAMBER - + 0


FRONT TIRES

RUBBER: _____

INSERT: _____

WHEEL: _____

REAR TIRES

RUBBER: _____

INSERT: _____

WHEEL: _____

BODY: _____

MOTOR: _____

NOTE: _____

TRACK

 TYPE Tight Smooth Open Bumpy

 SURFACE Asphalt Carpet Other

 TRACTION Low Medium High

GEAR RATIO

	2,13	116	118	120	122	124	125	2,13	87	93	96
32	7,72	7,85	7,99	8,12	8,25	8,32	8,32	22	8,42	9,00	9,29
33	7,49	7,62	7,75	7,87	8,00	8,07	8,07	23	8,06	8,61	8,89
34	7,27	7,39	7,52	7,64	7,77	7,83	7,83	24	7,72	8,25	8,52
35	7,06	7,18	7,30	7,42	7,55	7,61	7,61	25	7,41	7,92	8,18
36	6,86	6,98	7,10	7,22	7,34	7,40	7,40	26	7,13	7,62	7,86
37	6,68	6,79	6,91	7,02	7,14	7,20	7,20	27	6,86	7,34	7,57
38	6,50	6,61	6,73	6,84	6,95	7,01	7,01	28	6,62	7,07	7,30
39	6,34	6,44	6,55	6,66	6,77	6,83	6,83	29	6,39	6,83	7,05
40	6,18	6,28	6,39	6,50	6,60	6,66	6,66	30	6,18	6,60	6,82
								31	5,98	6,39	6,60