CUSTOM WORKS
INTIMIDATOR GBX

Driver:_____
Date:_____
Event:_____
Class:_____
Track:_____Length:_____

❑Clay ❑Hard Packed ❑Loose Dirt
❑Carpet ❑Asphalt ❑Concrete
❑Flat ❑Banked ❑True Oval ❑Tri-Oval
Traction: ❑High ❑Medium ❑Low

FRONT SUSPENSION

Toe IN / OUT _____

*Camber:*_____ *Caster:* _____ — *Sway Bar:* ❑None ❑.063" ❑.078" — *Camber:*_____ *Caster:* _____

-Shade in locations of suspension arms and camber links on the shock tower.

LEFT

Link Position: ❑Ball Stud ❑Caster Block

Camber Rate Shims: _____

Front Axle: ❑Stock ❑Extended

Axle Spacing Shims: _____

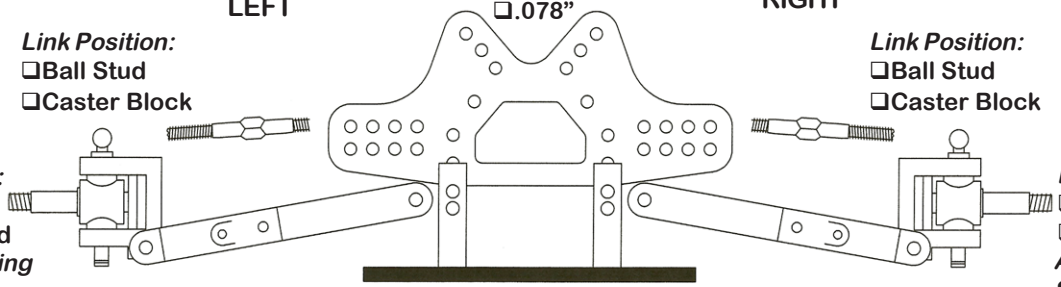

RIGHT

Link Position: ❑Ball Stud ❑Caster Block

Camber Rate Shims: _____

Front Axle: ❑Stock ❑Extended

Axle Spacing Shims: _____

Roll Center: ❑High ❑Low

SHOCKS

	Spring	Oil	Piston	Length	Limiters	Collar
RF:	_____	____	_____	_____	_____	_____
LF:	_____	____	_____	_____	_____	_____
RR:	_____	____	_____	_____	_____	_____
LR:	_____	____	_____	_____	_____	_____

Corner Weights:
*LF:*_____ *RF:*_____
*LR:*_____ *RR:*_____

Overall Weight: _____

Chassis Heights by Location:
*LF:*_____ *RF:*_____
*LR:*_____ *RR:*_____

Measured From:
❑Top of Chassis
❑Bottom of Chassis

TIRES ❑Foam ❑Street Rubber ❑Buggy

	Compound	Insert	Wheel	Diameter
RF:	_____	_____	_____	_____
LF:	_____	_____	_____	_____
RR:	_____	_____	_____	_____
LR:	_____	_____	_____	_____

Notes: _____

*Traction Additive:*_____

-Shade in Areas of Traction Additive and Draw in Tire Grooves

LF *RF*

LR *RR*

REAR SUSPENSION

LEFT

*Camber:*_____
Toe-In: _____
Axle Spacing: _____

Hub Spacing:
F❑❑❑❑❑❑❑R

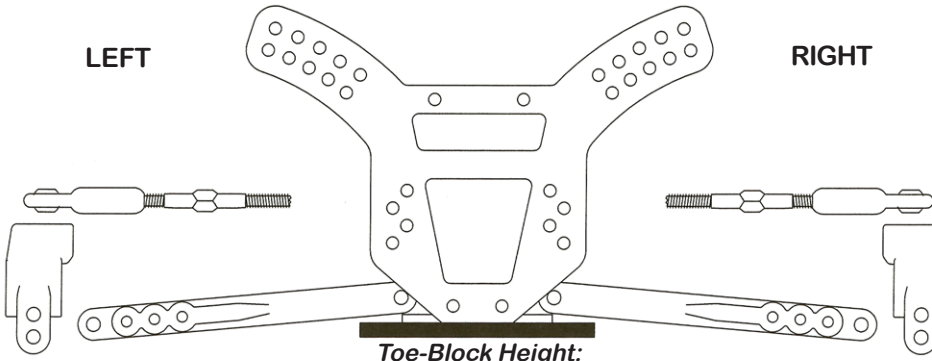

Toe-Block Height:
LR:_____ RR:_____

Anti-Squat Shims:
LR:_____ RR:_____

RIGHT

*Camber:*_____
Toe-In: _____
Axle Spacing: _____

Hub Spacing:
F❑❑❑❑❑❑❑R

-Shade in locations of suspension arms and camber links on the shock tower and bearing carrier.

MISC...

Battery Location: _____
Motor: _____
Pinion:_____Spur:_____
❑Modified ❑Late Model

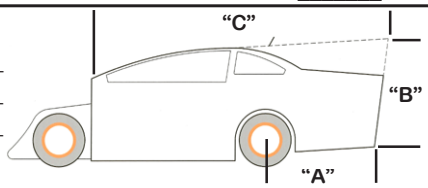

Body: _____
Spoiler: _____
Side Dam "A":_____
Side Dam "B":_____
Side Dam "C":_____

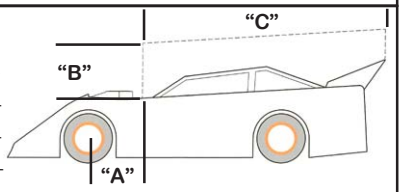

*Driver Comments:*_____