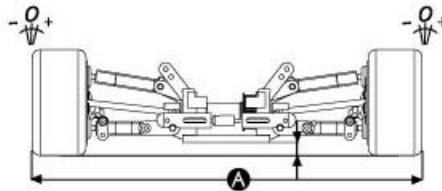
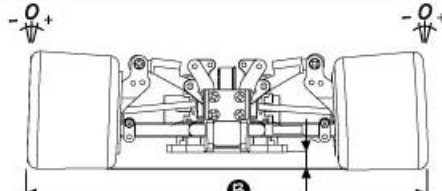







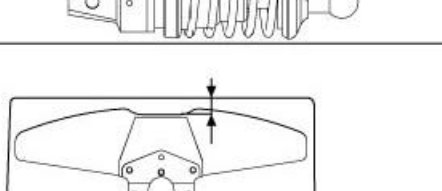
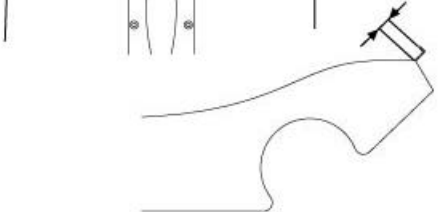


PROCEED SET UP SHEET

| Date | Race | Engine | Fuel | |
|---|--------------------------|----------------|----------------|----------------|
| Weather | Mechanic | Head clearance | Track Traction | |
| Driver | Best lap | Plug | Radio | |
| Track | Position | Muffler | | |
| Chassis data | | Standard Setup | Option Setup 1 | Option Setup 2 |
|  | Front track-w A | 253 mm | mm | mm |
| | Road clearance | mm | mm | mm |
| | Camber in | -1.5 | | |
| | Front toe-in | 0 ~ -1 | | |
| | Front tire | HPI 35 | | |
| | Diameter | 69 | | |
|  | Rear track-w B | 263 mm | mm | mm |
| | Road clearance | mm | mm | mm |
| | camber in | -2.0 | | |
| | Rear toe-in | 1.5 | | |
| | Rear tire | HPI 35 | | |
| | Diameter | 76 | | |
|  | Front bottom-stop | mm | mm | mm |
| | Front Up-stop | 0 mm | mm | mm |
|  | Rear bottom-stop | mm | mm | mm |
| | Rear up-stop | 6 mm | mm | mm |
|  | Front caster position | 3 mm | mm | mm |
| | | | | |
|  | Rear upper arm shim | 2 mm | mm | mm |
| | | | | |
|  | Front stabilizer | 1.8 | | |
| | Adjuster position | No Adjuster mm | mm | mm |
| | Rear stabilizer | 3.0 | | |
|  | Front shock spring | BLACK | | |
| | Spring adjuster position | 2 ~ 4 mm | mm | mm |
| | Shock oil | #35 | | |
| | Piston | No 4 | mm | |
|  | Rear shock spring | BLACK | | |
| | Spring adjuster position | 1 ~ 3 mm | mm | mm |
| | Shock oil | #35 | | mm |
| | Piston | No 5 | | |
|  | 2speed 1st gear | 18 / 49 | / | / |
| | 2speed 2nd gear | 21 / 46 | / | / |
| | 4WD side pulley | 27 T | T | T |
| | | | | |
|  | Body | MS LOLA | | |
| | Body position | 20 mm | mm | mm |
| | Spoiler position | 7 mm | mm | mm |
| | | | | |
| | | | | |
| | | | | |