

Setup Sheet

Track: _____

Driver: _____

Indoor
 Outdoor

Smooth
 Rough

Slippery
 High-Bite
 Blue-Groove

Date: _____

Tight / Open

FRONT SUSPENSION

(Circle or Check the Appropriate Settings)

Toe In _____ °
 Out _____ °


Ride Height _____

Camber - _____ °
 + _____ °


Caster Stock _____ °
 Other _____ °

Sway Bar No
 Yes size _____

of washers under steering / tie-rod ball studs
Spindle ball stud: _____
Bellcrank ball stud: _____



of washers under ball stud: _____

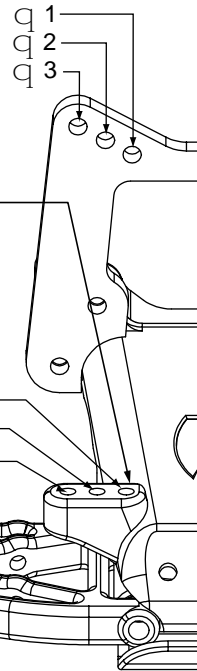

Front Shocks

Oil: _____

Piston: _____ Standard / Drilled

Spring: _____

Limiters: Inside- _____ Outside- _____

Spindle Height

Top
 Middle
 Bottom

Axle Spacer

Narrow - inside
 Wide - outside

REAR SUSPENSION

Toe-In Inside _____ °
 Outside _____ °

Pivot Support _____ No Shim
 Shim Under Front
 Shim Under Rear } # of shims: _____

Ride Height _____

Camber - _____ °
 + _____ °

Drive Shafts Dogbones Aluminum
 CVDs Steel

Rear Hub Spacing Forward
 Center
 Rear

Outdrives Steel
 Plastic


Sway Bar No
 Yes size _____

Wing Position

Forward
 Back

Wing Mount

Top
 Bottom

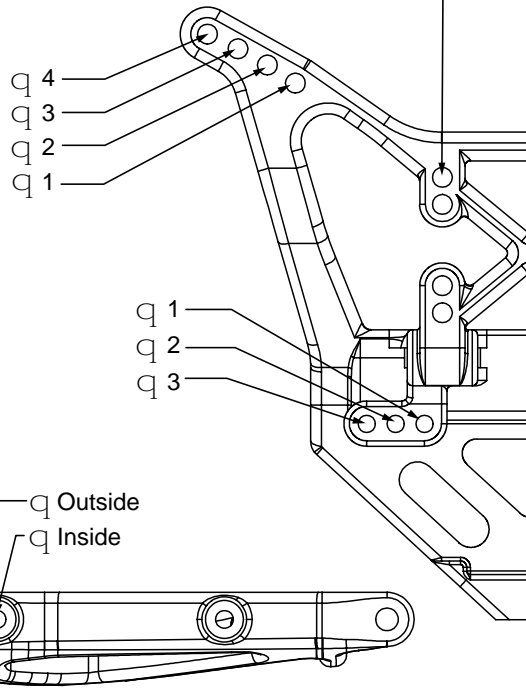

Rear Shocks

Oil: _____

Piston: _____ Standard / Drilled

Spring: _____

Limiters: Inside- _____ Outside- _____

Tires
Front: _____ Compound _____ Foam _____
Rear: _____ Compound _____ Foam _____

Motor: _____ Pinion/Spur: ____ / ____
Battery Position: _____

Notes: _____