


TRACK CONDITIONS

Surface: Smooth Med. Bumpy
 Size: Open Med. Tight
 Traction: High Med. Low


Track Temp/Air Temp: _____° / _____°
 Note: _____

FRONT SUSPENSION




Track Width: _____ mm
 Anti-Roll Bar: _____°
 Diff. Fluid: _____ wt
 One Way
 Solid Axle

Toe Angle: _____°
 Front Camber: **L** _____° **R** _____°




Front Ride Height: _____ mm
 Front Droop: _____ mm
 Caster: _____ mm
 Offset: +1.50 +0.75
 +0.0 -0.75

► TIRE
 Manufacture: _____



Shore: **L** _____° **R** _____°
 Diameter(Start): **L/R** _____ / _____ mm
 Diameter(Finish): **L/R** _____ / _____ mm

► SHOCKS
 Oil: _____ wt




Piston: _____
 Spring: _____ mm

► ACKERMANN


 L M S Standard

REAR SUSPENSION




Track Width: _____ mm
 Anti-Roll Bar: _____°
 Diff. Fluid: _____ wt
 Solid Axle

Toe Angle: _____°
 Rear Camber: **L** _____° **R** _____°




Rear Ride Height: _____ mm
 Rear Droop: _____ mm
 Offset: +1.50 +0.75
 +0.0 -0.75

► TIRE
 Manufacture: _____
 Shore: **L** _____° **R** _____°




Diameter(Start): **L/R** _____ / _____ mm
 Diameter(Finish): **L/R** _____ / _____ mm

► SHOCKS
 Oil: _____ wt
 Piston: _____
 Spring: _____ mm



ENGINE




Gear Ratio: 1st ___ T / ___ T
 2nd ___ T / ___ T

Clutch Set Type:
 3 Shoe Push Type
 Clutch Spring: _____ mm
 Clutch Shoe: _____ mm
 Clearance: _____ mm


Engine: _____
 Head Shim: _____ mm
 Plug: _____
 Fuel: _____
 Muffer: _____
 Carb Dia: _____ mm

Note: _____

WHEELBASE

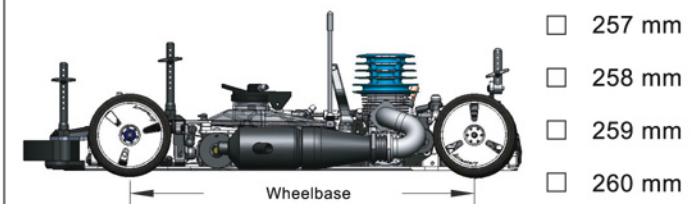

BODY

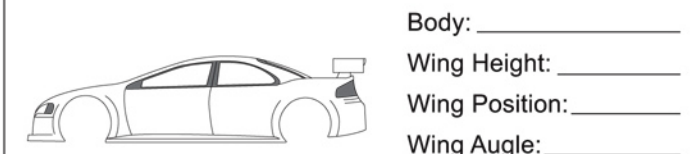


TRACK CONDITIONS

Surface: Smooth Med. Bumpy
 Size: Open Med. Tight
 Traction: High Med. Low


Track Temp/Air Temp: _____° / _____°
 Note: _____

FRONT SUSPENSION

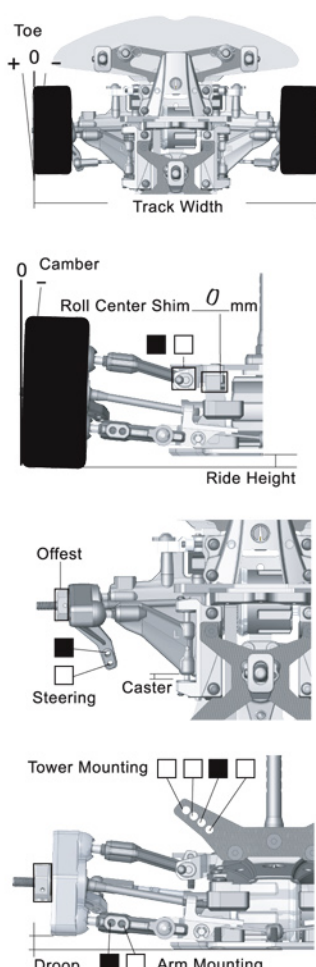


Track Width: 199 mm
 Anti-Roll Bar: 90 °
 Diff. Fluid: _____ wt
 One Way
 Solid Axle
 Toe Angle: 1 °
 Front Camber: **L** 2 ° **R** 2 °
 Front Ride Height: 5.5 mm
 Front Droop: 2 mm
 Caster: 3 mm
 Offset: +1.50 +0.75
 +0.0 -0.75
 ▶ TIRE
 Manufacture: _____
 Shore: **L** _____° **R** _____°
 Diameter(Start): **L/R** 62 / 62 mm
 Diameter(Finish): **L/R** _____ / _____ mm
 ▶ SHOCKS
 Oil: 600 wt
 Piston: standard
 Spring: 1.7 mm
 ▶ ACKERMANN
 L M S Standard

REAR SUSPENSION

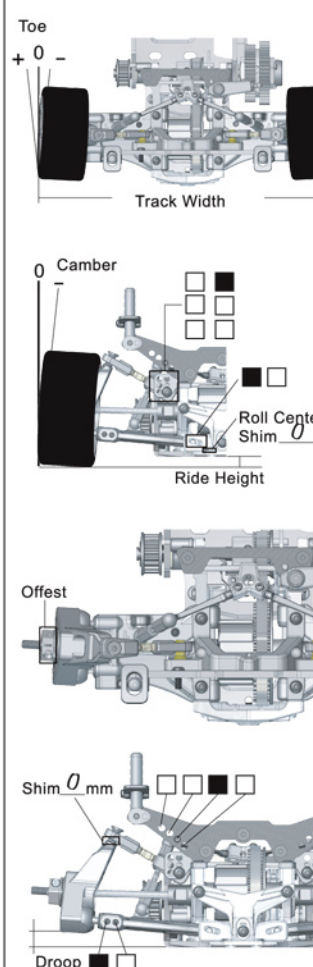


Track Width: 200 mm
 Anti-Roll Bar: 0 °
 Diff. Fluid: 10000 wt
 Solid Axle
 Toe Angle: 2.5 °
 Rear Camber: **L** 4 ° **R** 4 °
 Rear Ride Height: 6 mm
 Rear Droop: 3 mm
 Offset: +1.50 +0.75
 +0.0 -0.75
 ▶ TIRE
 Manufacture: _____
 Shore: **L** _____° **R** _____°
 Diameter(Start): **L/R** 62 / 62 mm
 Diameter(Finish): **L/R** _____ / _____ mm
 ▶ SHOCKS
 Oil: 600 wt
 Piston: standard
 Spring: 1.6 mm

ENGINE

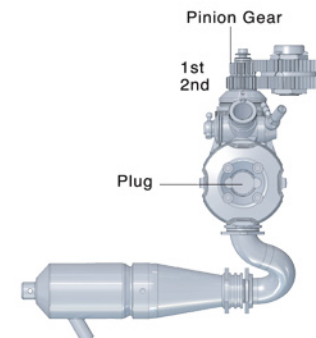


Gear Ratio: 1st 16 T / 51 T
 2nd 21 T / 46 T
 Clutch Set Type:
 3 Shoe Push Type
 Clutch Spring: 1.8 mm
 Clutch Shoe: black
 Clearance: _____ mm
 Engine: _____
 Head Shim: _____ mm
 Plug: _____
 Fuel: _____
 Muffer: _____
 Carb Dia: _____ mm
 Note: _____

WHEELBASE

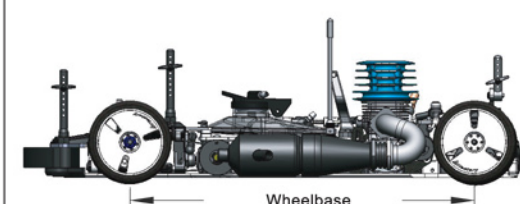

257 mm
 258 mm
 259 mm
 260 mm

BODY



Body: _____
 Wing Height: _____
 Wing Position: _____
 Wing Angle: _____