


# GT-4 SETUP SHEET

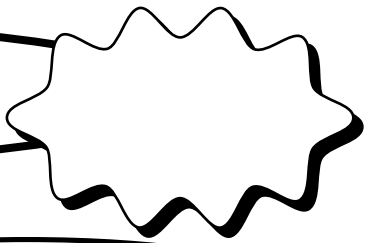

Date: \_\_\_\_\_  
Name: \_\_\_\_\_

Track: \_\_\_\_\_

Fastest lap: \_\_\_\_\_

Revised 9.20.01

## Front Suspension

Plastic [Shock body type]  Alum

Length \_\_\_\_\_ mm  
Preload \_\_\_\_\_ mm  
Spring \_\_\_\_\_  
Shock oil # \_\_\_\_\_  
Piston # \_\_\_\_\_  
Shock position

Caster [Shims behind upper arm]  
Thick (2.6mm) \_\_\_\_\_  
Thin (1.3mm) \_\_\_\_\_

Width \_\_\_\_\_ mm  
Camber \_\_\_\_\_ °  
Ride height \_\_\_\_\_ mm  
Downstop \_\_\_\_\_ mm  
Bumpstop \_\_\_\_\_ mm  
Toe angle \_\_\_\_\_ °

Front anti-roll bar  None  \_\_\_\_\_ °  
Front one-way differential   
Gear diff  Diff grease \_\_\_\_\_

## Rear Suspension

Plastic [Shock body type]  Alum

Length \_\_\_\_\_ mm  
Preload \_\_\_\_\_ mm  
Spring \_\_\_\_\_  
Shock oil # \_\_\_\_\_  
Piston # \_\_\_\_\_  
Shock position

Width \_\_\_\_\_ mm  
Camber \_\_\_\_\_ °  
Ride height \_\_\_\_\_ mm  
Downstop \_\_\_\_\_ mm  
Bumpstop \_\_\_\_\_ mm  
Toe angle \_\_\_\_\_ °

Rear anti-roll bar  None  \_\_\_\_\_ mm  
Solid rear axle   
Gear diff  Diff grease \_\_\_\_\_

190mm rear setup (short pillow balls & dogbones)  
 200mm rear setup (long pillow balls & dogbones)

	Front	Tire _____	Rear	Tire _____
		Insert _____		Insert _____
		Wheel _____		Wheel _____

**Body**  
\_\_\_\_\_

**Engine** Make \_\_\_\_\_ Pipe \_\_\_\_\_ Cooling head \_\_\_\_\_  
Spec \_\_\_\_\_ Manifold \_\_\_\_\_ Head clearance \_\_\_\_\_  
Plug \_\_\_\_\_ Fuel \_\_\_\_\_

**Transmission**  Single  2-Speed

1st gear (pinion / spur) \_\_\_\_\_ / \_\_\_\_\_  
2nd gear (pinion / spur) \_\_\_\_\_ / \_\_\_\_\_

**Comments**  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_